

BOLT TABLE FRAME LINE 1 & 3				
LOCATION	QUAN	TYPE	DIA	LENGTH
ER-1/ER-2	4	A325T	1/2"	2"
Columns/Raf	8	A325T	1/2"	2"


FLANGE BRACE TABLE FRAME LINE 1 & 3			
▽ID	QUAN	MARK	LENGTH
1	8	FB19.3	1'-7 1/4"


CONNECTION PLATES FRAME LINE 1 & 3	
□ID	MARK/PART
1	CLC008
2	CLC081
3	CLC083
4	CLC089
5	CLC061
6	CLC062
7	CLC122
8	CLC025

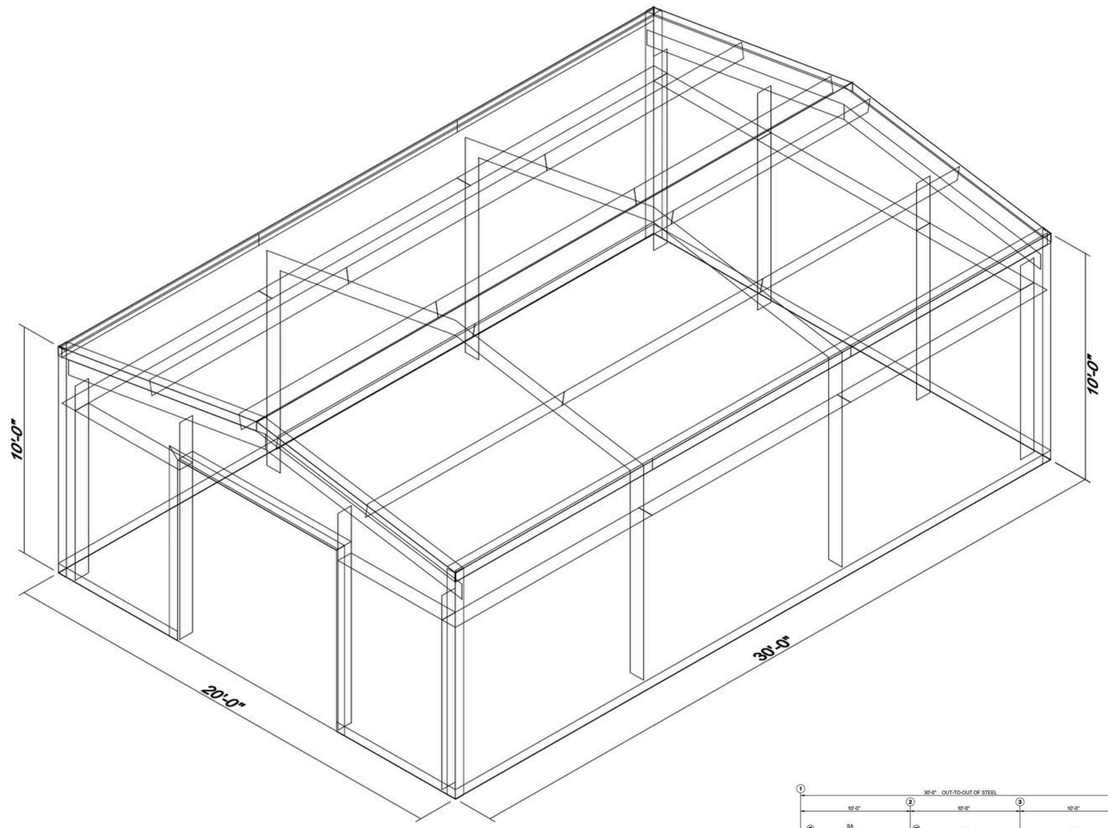


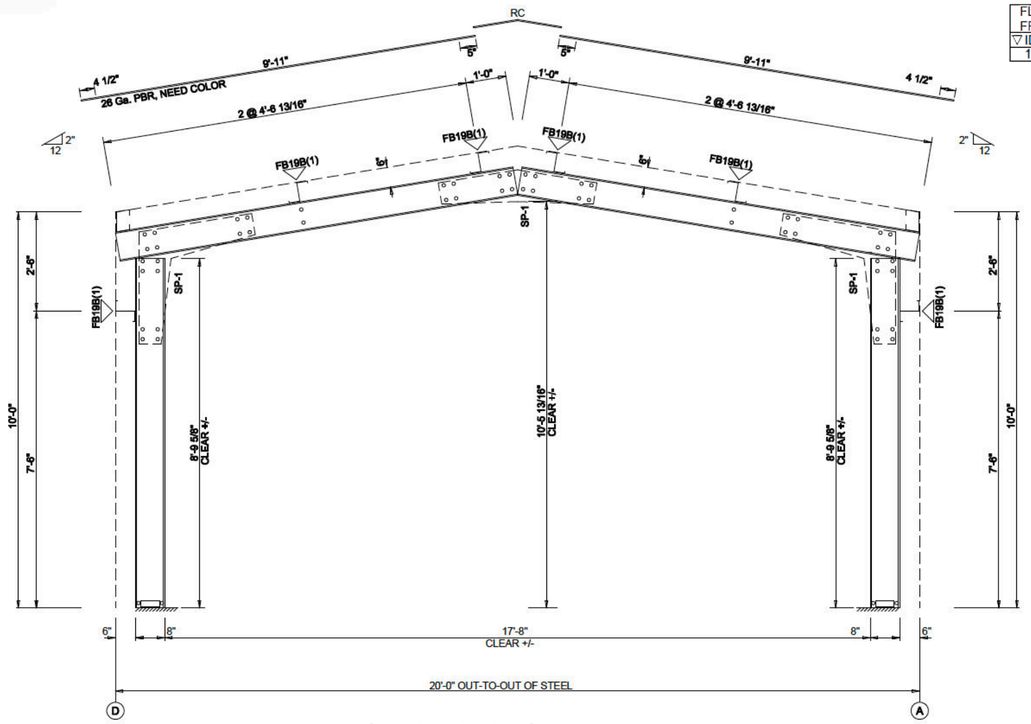


RIGID FRAME ELEVATION: FRAME LINE 2 3

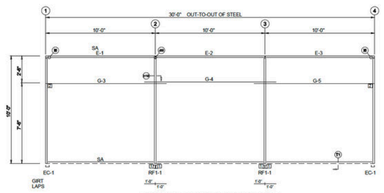


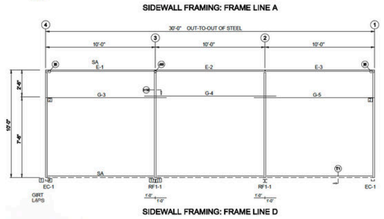




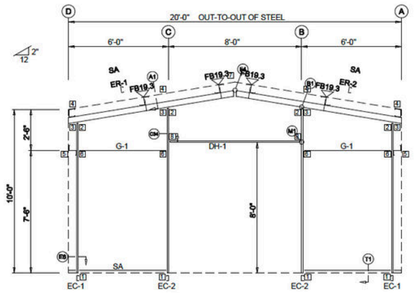


ENDWALL FRAMING: FRAME LINE 1

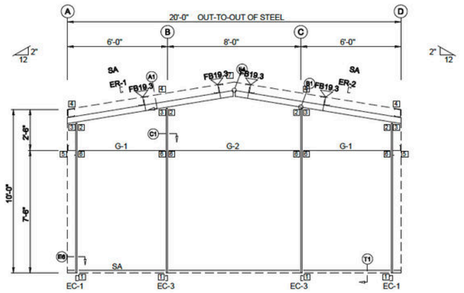

ENDWALL FRAMING: FRAME LINE 4

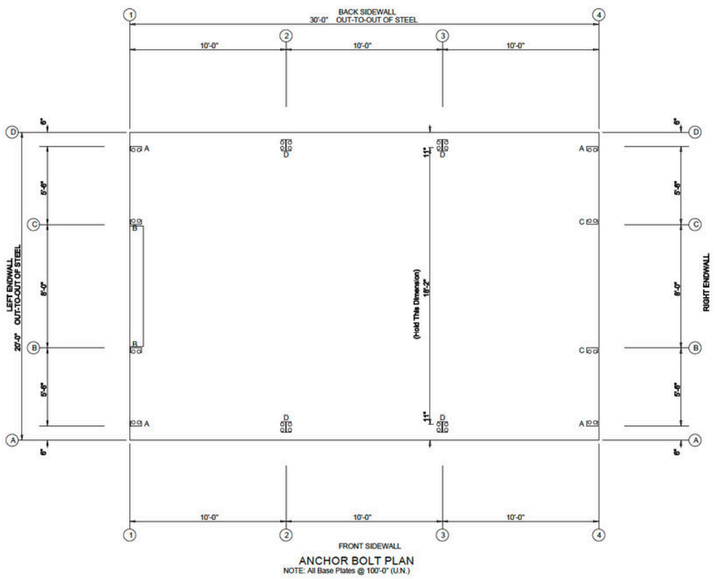


ANCHOR BOLT PLAN
NOTE: All Base Plates @ 100'-0" (U.N.)

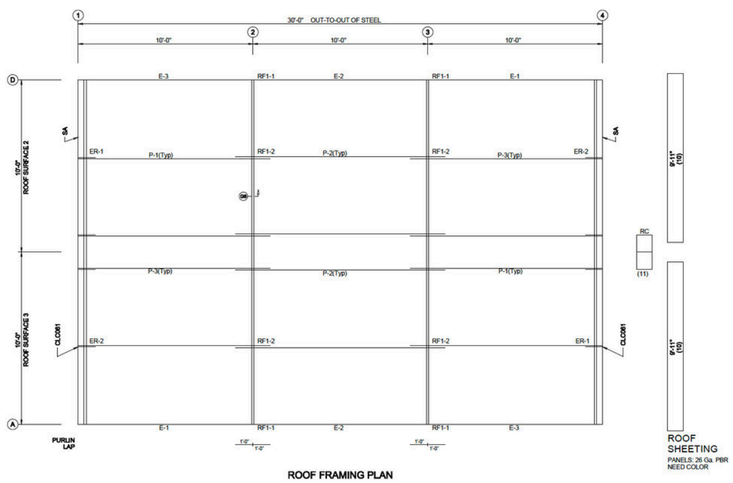


ROOF FRAMING PLAN

ROOF SHEETING
PANELS: 26 Ga. PBR NEED COLOR

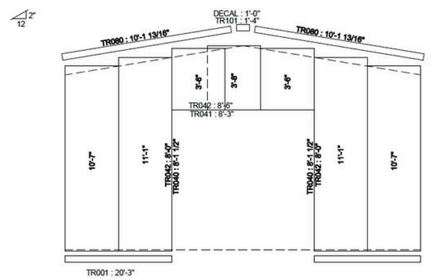

ENDWALL SHEETING & TRIM: FRAME LINE 1
PANELS: 26 Ga. PBR - NEED COLOR

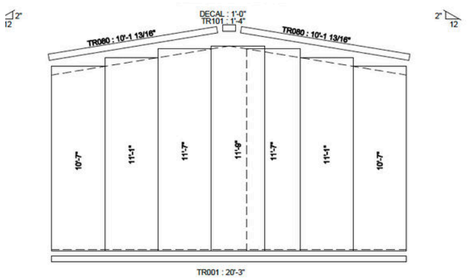

ENDWALL SHEETING & TRIM: FRAME LINE 4
PANELS: 26 Ga. PBR - NEED COLOR

GENERAL NOTES:

MINOR FIELD WORK OF STRUCTURAL, SECONDARY AND PANEL/TRIM ITEMS MAY BE NECESSARY TO ENSURE PROPER FIT. SUCH WORK IS CONSIDERED A NORMAL PART OF METAL BUILDING ERECTION. WE WILL NOT HONOR BACKCHARGES FOR MINOR FIELD WORK.

Norsteel Buildings			**Customer:**	
DLR ADDRESS 2				
Drafter:	**Date:**		**Designer:**	**Date:**
Detailer:	**Date:**		**Sales ID:** JH	**Factory ID:** 7733.24.30.10
Checker:	**Date:**			
Engineered Drawings Summary				**Sht E 2 of 9**